

## CL32-BK

8 x 4" Passive Column Array

### FEATURES

- 8 x 4" mid-frequency drivers, 24 x 0.75" high-frequency drivers.
- 130dB Max SPL (Peak).
- Frequency Response of 70Hz - 20kHz(±3dB).
- 100° (H) x 35° (V) dispersion angle.
- Robust wooden enclosure with a wear-resistant finish.
- Mounting bracket included.

### APPLICATIONS

- Houses of Worship
- Museums
- Public Transport Stations
- Conference Spaces
- Lecture Halls
- Live Sound Reinforcement



### DESCRIPTION

The CL32 is an elegant 2-way passive column array speaker system that comprises 8 x 4" mid-frequency drivers alongside 24 x 0.75" high-frequency drivers with a maximum SPL of 130dB (peak).

The CL32 has a horizontal dispersion angle of 100° (-6dB), and a vertical coverage angle of 35° (-6dB). The CL32 can be combined with either the CL32J or CL16J to form a larger column speaker system.

Mounting options include 2 x M8 mounting points for the included CL32-FLB bracket. The rear panel offers input connection via Euroblock.

The wooden enclosure is composed of birch and finished in a scratch/wear-resistant paint, with a perforated hexagonal mesh steel grille with acoustic foam backing. Available in black or white.




## Specifications

<b>Specifications</b>	
Model	CL32
System type	Column Array PA System
Frequency Response	70Hz - 20kHz ( $\pm 3$ dB)
	53Hz - 23kHz (-10dB)
Horizontal Coverage Angle	100 $^{\circ}$ (-6dB)
Vertical Coverage Angle	35 $^{\circ}$ (-6dB)
Power Rating	400W RMS, 800W Program, 1600W Peak
Maximum SPL	127dB Continuous, 130dB Peak
Sensitivity	101dB
Nominal Impedance	4 $\Omega$
<b>Speaker</b>	
MF Driver	8 x 4" mid-frequency driver
HF Driver	24 x 0.75" high-frequency driver
Drive mode	Two-way PASSIVE
<b>Enclosure</b>	
Cabinet	Birch
Finish	Scratch-resistant and wear-resistant paint finish (White or Black option)
Grille	Hexagonal mesh perforated steel with acoustic foam backing.
Fittings	Connection parts, Threaded pole-mount socket, Mounting points
Mounting Bracket	2 x M8 mounting points for standard CL32-FLB
<b>Connect</b>	
Connectors	Removable locking connector with screw terminals
Pin Connections (Input)	+/-
Dimensions (H/W/D)	878 x 140 x 185mm



DIMENSIONS

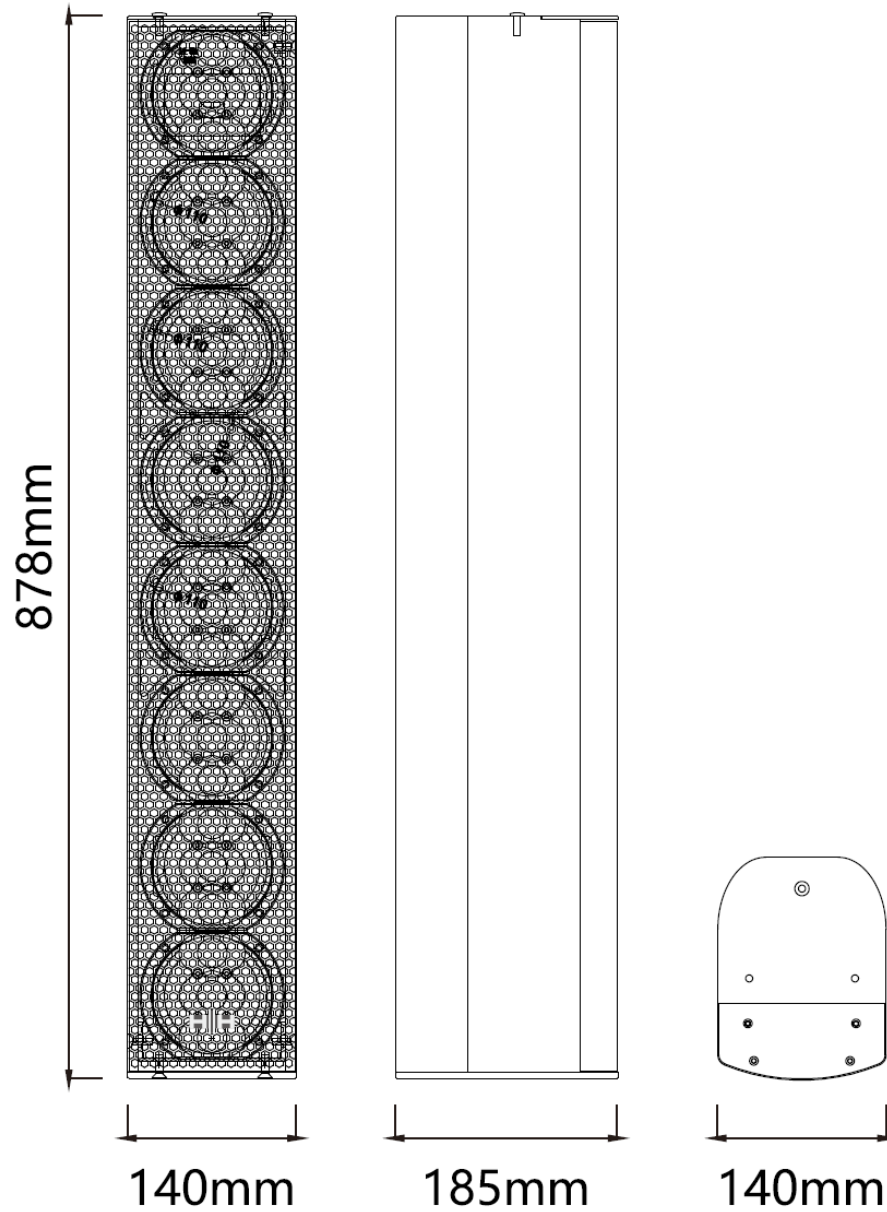

HH Electronics is a trading style of  
Headstock Distribution Ltd,  
Steelpark Road, Coombswood Business Park West,  
Halesowen, West Midlands, B62 8HD, UK.  
© 2024 HH Electronics Ltd  
[www.hhaudio.com](http://www.hhaudio.com)

In the interest of continued development, HH reserves the right to amend  
product specification without prior notification.

