

## APT-P6

### 2-Way 6.5-inch Pendant Loudspeaker

#### FEATURES

- Celestion 6.5-inch coaxial driver.
- Custom horn flare designed in collaboration with Celestion.
- Lo-Z & 100v/70v operation via multi-tap transformer.
- Optional wall mount bracket to expand versatility.
- Magnetic edge-to-edge grille with removable HH logo.
- Available in Black and White.

#### APPLICATIONS

- Restaurants
- Bars
- Corporate facilities
- Retail
- Education



#### DESCRIPTION

The APT-P6 pendant speaker brings decades of British design and engineering expertise to installation audio. Featuring a Celestion 6.5-inch coaxial driver with a 1.5-inch LF voice coil and 1-inch HF voice coil, the APT-P6 delivers crystal-clear audio. Its custom horn flare profile ensures balanced sound reproduction throughout the coverage area, making it ideal for a wide range of environments.

The APT-P6 offers a sensitivity of 90dB (1W/1M) and a 120W AES power rating, yielding a maximum SPL of 110dB. With a frequency response of 70Hz to 20kHz, the APT-P6 reproduces beautifully balanced audio. For enhanced low-frequency performance, the APT-P6 pairs perfectly with the APT-W8S surface-mount subwoofer.

Available in sleek black or white finishes, the APT-P6's elegant, tapered profile complements modern spaces and is the perfect solution for architecturally challenging environments, such as those with high ceilings or where traditional ceiling speakers aren't an option. A rear dust cover protects the connectors while maintaining the speaker's sophisticated aesthetic.

The APT-P6 is equipped with a built-in multi-tap transformer, suitable for both Lo-Z and 100V/70V applications, easily adjustable via a rotary switch hidden beneath the magnetic edge-to-edge grille. The rear steel mounting point ensures secure suspension via steel wire or surface mount installation via an optional wall-mount bracket.



## SPECIFICATIONS


Specifications	
<i>Model</i>	<i>APT-P6</i>
<i>System type</i>	<i>2-Way Coaxial Pendant Loudspeaker</i>
<i>Driver Specifications</i>	<i>Celestion 6.5-inch Coaxial Driver with 1.5-inch LF VC and 1-inch HF VC</i>
<i>100v Power Options</i>	<i>60W, 30W, 15W</i>
<i>70V Power Options</i>	<i>60W, 30W, 15W, 7.5W</i>
<i>Nominal System Impedance</i>	<i>8 Ohms</i>
<i>Power Rating</i>	<i>120W AES, 240W Continuous, 480W Peak</i>
<i>Recommended Amplifier</i>	<i>MZ-140D, MZ-140Q, MZ-280Q</i>
<i>Sensitivity 1W/1m</i>	<i>90dB</i>
<i>Maximum SPL (1m)</i>	<i>110dB SPL, 116dB SPL (Peak)</i>
<i>Frequency Response</i>	<i>70Hz-20kHz</i>
<i>Input / Link Connector</i>	<i>4-pin Euroblock +/- +/-</i>
<i>Dispersion</i>	<i>120°</i>
Enclosure	
<i>Main Construction Material</i>	<i>ABS</i>
<i>Finish</i>	<i>Black/White ABS</i>
<i>Grille</i>	<i>Black/White Fine Mesh Perforated Steel with Powdercoated Finish</i>
<i>Mounting Bracket</i>	<i>Optional wall mounting bracket.</i>
<i>Mounting Suspension Points</i>	<i>Integrated eyelet for suspended mounting via carabiner.</i>
Dimensions	
<i>Outer Diameter</i>	<i>308mm</i>
<i>Max Depth</i>	<i>305mm</i>
<i>Optional Accessories</i>	<i>NA</i>
<i>In the interest of continued development, HH reserves the right to amend product specification without prior notification.</i>	



## FREQUENCY RESPONSE



## DIMENSIONS

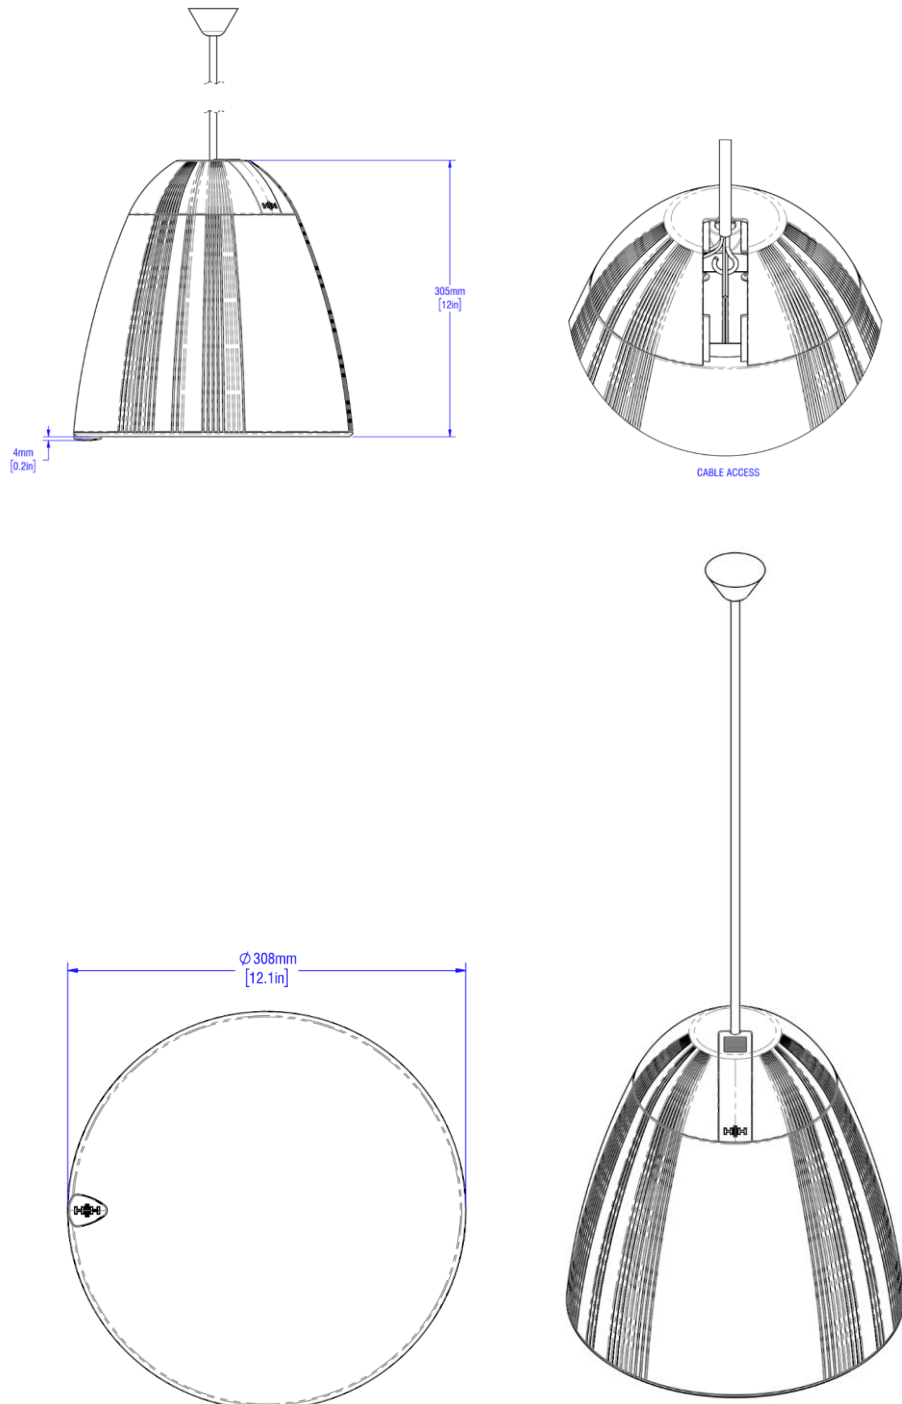

HH Electronics is a trading style of  
Headstock Distribution Ltd,  
Steelpark Road, Coombswood Business Park West,  
Halesowen, West Midlands, B62 8HD, UK.  
© 2024 HH Electronics Ltd  
[www.hhaudio.com](http://www.hhaudio.com)

In the interest of continued development, HH reserves the right to amend product specification without prior notification.

