

## LA10D


2 x 10" Passive 2-Way Line Array Loudspeaker

### FEATURES

- 2 x 10" mid-low frequency drivers, 1 x 3" high-frequency compression driver.
- 138dB Max SPL (Peak).
- Frequency Response of 70Hz - 18kHz ( $\pm 3$ dB).
- 90° (H) x 10° (V) dispersion angle.
- Robust wooden enclosure with a wear-resistant finish.

### APPLICATIONS

- Small to medium scale touring and concerts
- Medium to large sized Houses of Worship
- Medium to large scale clubs and ballrooms

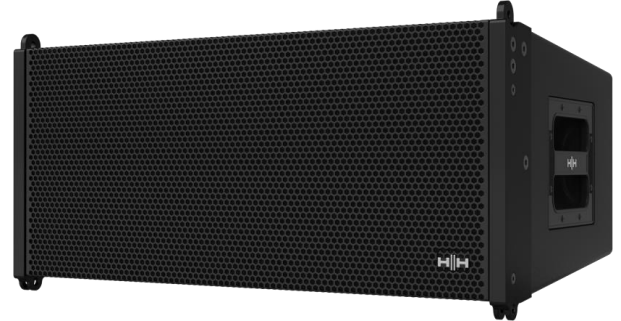

### DESCRIPTION

The LA10D is a 2-way dual 10" Line Array Loudspeaker that comprises 2 x 10" mid-low drivers alongside a 3" high-frequency compression driver with a magnesium alloy diaphragm providing a maximum SPL of 138dB (Peak).

Through symmetrical phase alignment technology, the coupling characteristics between the two 10" mid-low drivers are optimised to improve the efficiency of the system. The all-neodymium structure of the high-frequency compression driver combined with HH phase plug technology provides pinpoint directional control.

The LA10D has a horizontal coverage angle of 90° and a vertical coverage angle of 10°.

The 680mm wide enclosure is designed to pair seamlessly with the S18-H sub enclosure and features a 3-point rigging system for easily linking and splaying multiple enclosures. The enclosure is composed of robust plywood, finished with black paint and fitted with a hexagonal mesh steel grille with acoustic foam backing.






Specifications

<b>Specifications</b>	
System type	Dual 10" 2-Way Line Array Loudspeaker
Frequency Response	70Hz-18kHz(±3dB)
	65Hz-20kHz(-10dB)
Horizontal Coverage Angle	90°
Vertical Coverage Angle	10°
Power Rating	LF: 600W Continuous, 2400W Peak
	HF: 75W Continuous, 300W Peak
Maximum SPL	132dB Continuous, 138dB Peak
Sensitivity	104dB(1W@1m)
Nominal Impedance	LF: 8 Ohms, HF: 16 Ohms
<b>Speaker</b>	
LF Driver	2 x 10" Low-Frequency Driver
HF Driver	1 x 3" High-Frequency Compression Driver
<b>Enclosure</b>	
Cabinet	Plywood
Finish	Painted Black
Mounting Bracket	LA10D-FLB for Suspended Mounting
Grille	Hexagonal Mesh Black Perforated Steel with Acoustic Foam Backing
Fittings	2 x Side Handles, Rigging System
Rigging	3-Point Rigging System
<b>Connect</b>	
Connectors	2 x Speakon NL4
Pin Connections (Input)	1+/- (LF) and 2+/- (HF)
Pin Connections (Link)	1+/- and 2+/-
Dimensions (H/W/D)	300×680×400mm
Weight	32kg



DIMENSIONS

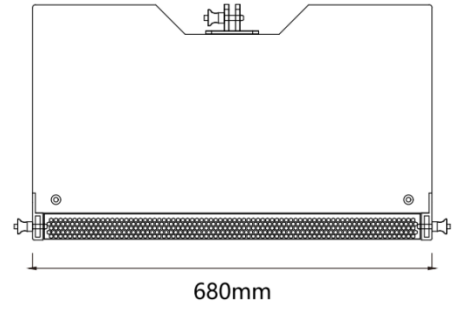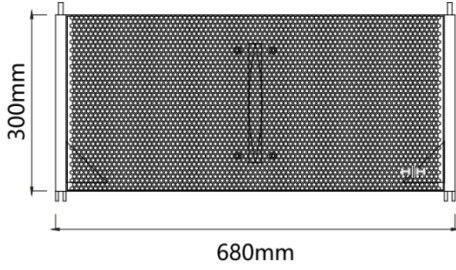

HH Electronics is a trading style of  
Headstock Distribution Ltd,  
Steelpark Road, Coombswood Business Park West,  
Halesowen, West Midlands, B62 8HD, UK.  
© 2024 HH Electronics Ltd  
[www.hhaudio.com](http://www.hhaudio.com)

In the interest of continued development, HH reserves the right to amend  
product specification without prior notification.

